




# Briton #1 for exit devices

## Which exit device is right for your application?



### Briton 378

Push Bar Panic Latch  
Certified to EN 1125 and CE marked

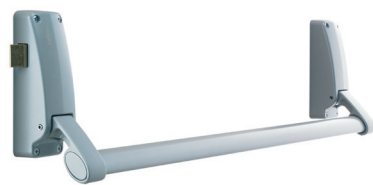

#### For Single Doors

- Easy to install
- Supplied in left or right hand, but can be reversed on site
- Suitable for doors up to 1300mm wide
- Can be used with rim cylinder fitted to the outside of the door



### Briton 376

Push Bar Panic Bolt  
Certified to EN 1125 and CE marked



#### For Single Doors

- Two point locking for extra security
- Suitable for doors up to 2500mm high x 1300mm wide (extension rods are required to achieve the maximum sizes)



### Briton 379.N

Push Bar Panic with Mortice Nightlatch  
Certified to EN 1125 and CE marked



#### For Single Doors

- Supplied right hand (reversible on site)
- Suitable for doors up to 1300mm wide
- Supplied with dual profile cylinder mortice nightlatch, accepts both euro and oval profile cylinders (cylinder not supplied)
- Anti-thrust device prevents unauthorised retraction of the latch bolt
- Optional models include alarmed and manually dogged (hold open) functions



### Briton 377

Push Bar Panic for Double Rebated Doors  
Certified to EN 1125 and CE marked



#### For Double Rebated Doors

- Single package that can be used on double rebated doors
- Consisting of a Briton 376 panic exit bolt, 378 panic exit latch and a 378DDS double door strike in one convenient pack
- Supplied in left or right hand, but can be reversed on site



### Briton 1438

Push Pad Emergency Latch  
Certified to EN 179 and CE marked



#### For Single Doors

- Supplied in left or right hand, but can be reversed on site
- Security - Grade 4: 3,000 Newtons
- Double door strike available for double rebated door applications
- Can be used with a rim cylinder fitted to the outside of the door



### Briton 372

Push Pad Emergency Bolt  
Certified to EN 179 and CE marked



#### For Single Doors

- Two point locking for extra security - Security - Grade 4: 3,000 Newtons
- Suitable for doors up to 2500mm high (extension rods are required to achieve the maximum sizes)
- Supplied with an easy clean socket



Key: Level of security



Located in a Public Area - Certified to EN 1125



Located in a Non Public Area - Certified to EN 179

### Need Access from Outside?

- Lever (1413.LE) or knob (1413.KE) operated version
- Supplied with Euro profile standard differ cylinder as standard
- A combination of market trends and the effect of The Equalities Act (DDA) has resulted in an increase in demand for lever operation
- Lever supplied loose to allow easy on-site handling
- Briton 9260 digital code lock option with lever operation
- Over 8000 non sequential code options
- Suitable for single and double door applications.



1413.LE

1413.KE

9260

CE all products are CE certified

## Confused by Classifications?

Get your FREE pocket sized guide to EN classification and CE markings today!



Visit [allegion.com/uk](http://allegion.com/uk)