

4700 Series

Door co-ordinator

The use of a co-ordinator is required for double doors where one leaf must close first, for example rebated double doors fitted with door closing devices. The co-ordinating unit is mounted on the underside of the transom. The trigger arrangement of the co-ordinator ensures the active leaf is held open until the inactive leaf closes and triggers the release of the active leaf.




Certification

- CE Marked to EN 1158
- Fire tested to EN 1634 for use on fire doors up to 2hr timber / 4hr steel
- DoP available at www.britoninspec.co.uk

Features & Functions

- Aluminium section 41mmx 16mm
- Anodised finish
- Suits equal or unequal pairs
- Available in different lengths to suit door size and configuration

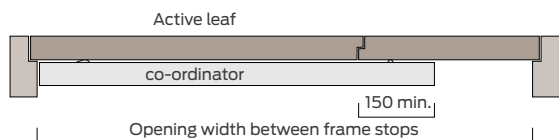

Ref:	Description	For door opening widths
	Door co-ordinator for use with rebated double doors to regulate the closing sequence.	
COR32	Channel length 813mm	864 - 1320mm
COR42	Channel length 1067mm	1320 - 1828mm
COR52	Channel length 1320mm	1575 - 2337mm



Allegion (UK) Limited
35 Rocky Lane, Aston, Birmingham B6 5RQ

Tel: +44 (0) 121 380 2400
Email: inspec@allegion.com