



## 5600 Series

### Cylinder lockcases

A series of mortice lockcases for Euro profile cylinders. Multiple function options - see table.



Briton 5660 Cylinder Panic Escape Sashlock

#### Certification

- CE Marked
- DIN 18251 compatible
- EN 12209 and EN 179 compliant (see table)
- Fire tested to EN 1634 for use on fire doors up to 90mins timber / 4hr steel
- DoP available at [www.britoninspec.co.uk](http://www.britoninspec.co.uk)

#### Features & Functions

- Zinc plated steel case.
- Backset 60mm- Centres 72/78mm
- Grade 304 stainless steel single piece forend available radiused or square ended with matching strike.
- Quick reversible latch allows quick and trouble free on-site handing without the need to dismantle the lockcase.
- Profiled latch and forend provides very positive location and a smooth, quiet operation.
- Stainless steel latch
- Sintered steel 8mm follower.
- 30° follower action with springing suitable for high frequency applications.
- Positive follower angle (1°) reduces the effect of wear which can lead to lever droop.
- Stainless steel deadbolt with 20mm throw on a single turn of the cylinder.
- Bolt through fixing holes to DIN 18251.
- Nightlatch has anti-thrust latch to prevent forced latch retraction when the door is closed.
- Escape mechanism of 5660 escape sashlock can be easily reversed on site to suit all handing options.


**Briton**

**5600 Series**

**Cylinder lockcases**

Product ref.	Function/description	Centres	CE Classification
5650	Nightlatch function operated by a half set of levers on the inside of the door to retract the latchbolt. Single cylinder on the outside operates the latchbolt with a single key turn. Latchbolt is automatically locked by the anti-thrust latch.	72mm	3X810F1BB20
5660	Escape lock with split follower - Latchbolt withdrawn by lever handle from both sides. Split follower function enables both the deadbolt and latchbolt to be withdrawn simultaneously by inside lever handle. Easily reversible escape mechanism.	72mm	3X810F3BA20 (EN 12209) 376B1442AB/D (EN179)

Radiused and square forends are available with matching strikes. Add suffix .R or .S to product code:  
e.g 5650.R for radiused forend and strike, 5650.S for square forend and strike.

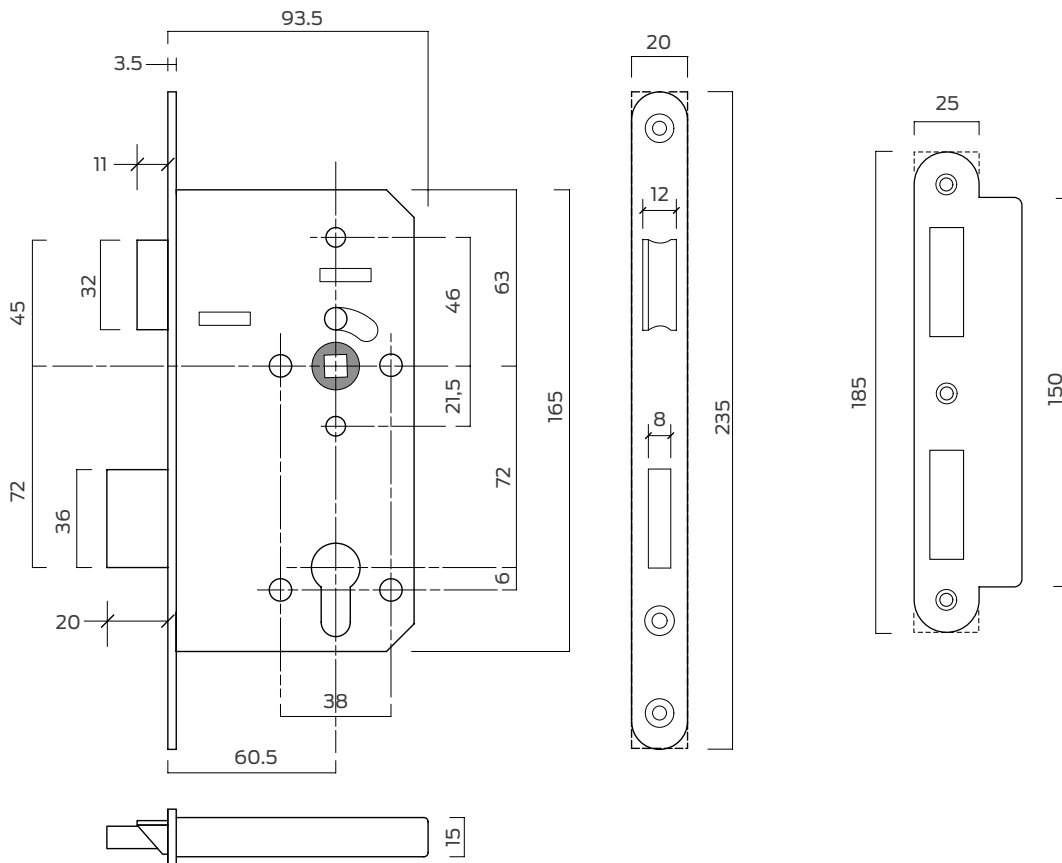

**Allegion (UK) Limited**  
35 Rocky Lane, Aston, Birmingham B6 5RQ

Tel: +44 (0) 121 380 2400  
Email: [inspec@allegion.com](mailto:inspec@allegion.com)