Briton

PANIC & EMERGENCY EXIT HARDWARE

Panic Exit Hardware

Introduction

The Briton 377 push bar panic exit device for double doors is designed to suit rebated double doors. Featuring an ant-thrust device to prevent forced latch retraction and two point locking for extra security, this solution is ideal for public areas such as shops, schools, hospitals and cinemas.

Features & Functions

- Comprises Briton 376 vertical bolt and Briton 378 rim latch devices.
- Products designed to satisfy panic exit applications or emergency exit applications.
- Tested in excess of 200,000 cycles.
- Suitable for rebated double doors with the rim latch fitted to the first opening leaf.
- Handing reversible on-site.
- Durable aluminium die cast body and end boxes with extruded aluminium guides.
- Tubular steel cross bar and vertical shoots can be cut on-site to suit door width and height.
- 378DDS double door strike included
- All versions supplied complete with fixings, installation instructions and self adhesive "Push Bar to Open" signage.
- Available in sprayed silver and plated metallic finishes.
- Options include alarm activation, manual hold-open (dogging) and quiet close pullman latches.



CE 🔛 🔛 🛩 certifire 🌀 💷

Certification

CE Marked to EN 1125 (AAA011) and EN 179

Fire tested to EN 1634 for use on fire doors up to 2hr timber / 4hr steel

Certifire Approved

Environmental Product Declaration in accordance with ISO 14025 and EN 15803

DoP available at www.britondops.co.uk



Allegion (UK) Limited 35 Rocky Lane, Aston, Birmingham B6 5RQ

T: +44 (0) 330 8080 617 E: contactuk@allegion.com



377

www.allegion.co.uk

Briton


PANIC & EMERGENCY EXIT HARDWARE

Panic Exit Device 377

Product features	Product references
	377
CE marked	
Panic exit device to EN 1125	
Emergency exit device to EN 179	
Device type	Push bar
Locking points	Single point rim latch and
	double vertical bolt
Suitable for single doors	
Suitable for double door combinations	
Min. / Max. door width (per leaf)	665mm/1300mm
Max. door height	2500mm
Push bar and vertical bolts cut on site	•
Adjustable top/bottom latches	
Site reversible	
Finishes available	SE, SS*, PB*, PS*
CE Classification	376B1322AA

Standard Available as an option/variant

Click for Autocad drawings

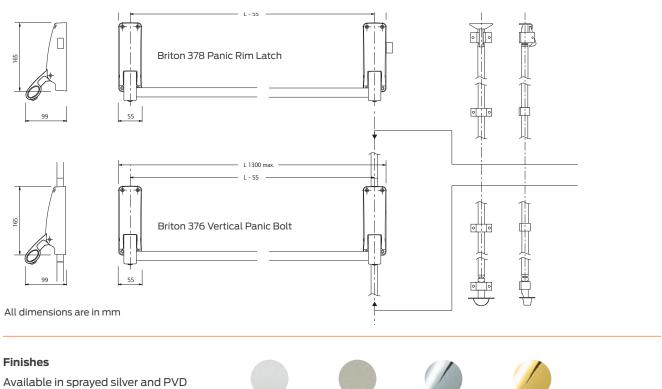

plated finishes.



SS* Satin stainless

steel

PB*

Polished brass

PS*

Polished

stainless steel

* PVD plated finishes

