

## Panic Exit Hardware

379.N  
379.NA  
379.ND

### Introduction

The Briton 379.N push bar panic exit device with mortice panic nightlatch is suitable for single and double doors. Featuring an anti-thrust device to prevent forced latch retraction, this well-known exit device is ideal for public areas where additional security is required.

### Features & Functions

- Push bar panic device with mortice nightlatch operation.
- Products designed to satisfy panic exit applications or emergency exit applications.
- Tested in excess of 200,000 cycles.
- Suitable for single doors and non rebated double doors in combination with Briton 376 panic bolt.
- Handing reversible on-site.
- Durable aluminium die cast body and end boxes.
- Tubular steel cross bar can be cut on-site to suit door width.
- All versions supplied complete with fixings, installation instructions and self adhesive "Push Bar to Open" signage.
- Available in sprayed silver and plated metallic finishes.
- Available with alarm activation (379.NA) or manual dogging (379.ND)
- Supplied with dual profile cylinder mortice nightlatch (cylinder not supplied).



379.N.SE



### Certification

CE Marked to EN 1125 (AAA011) and EN 179

Fire tested to EN 1634 for use on fire doors up to 2hr timber / 4hr steel

Certifire Approved

Environmental Product Declaration in accordance with ISO 14025 and EN 15803

DoP available at [www.britondops.co.uk](http://www.britondops.co.uk)

## Panic Exit Nightlatch 379.N

Product features	Product references		
	379.N	379.NA	379.ND
CE marked	■	■	■
Panic exit device to EN 1125	■	■	■
Emergency exit device to EN 179	■	■	■
Device type	Push bar	Push bar	Push bar
Locking points	Single point mortice nightlatch	Single point mortice nightlatch	Single point mortice nightlatch
Suitable for single doors	■	■	■
Suitable for double door combinations	✱	✱	✱
Min. / Max. door width (per leaf)	665mm/1300mm	665mm/1300mm	665mm/1300mm
Push bar cut on site	■	■	■
Site reversible	■	■	■
Alarm activation		■	
Dogged hold-open facility			■
Finishes available	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*
<b>CE Classification</b>	376B1322AA	376B1322AA	376B1322AA


■ Standard    □ Available as an option/variant

✱ Used in combination with Briton 376 vertical bolt device on non rebated double doors where the 379.N device is fitted to the first opening leaf.

[Click for Autocad drawings](#)



Briton 379.N

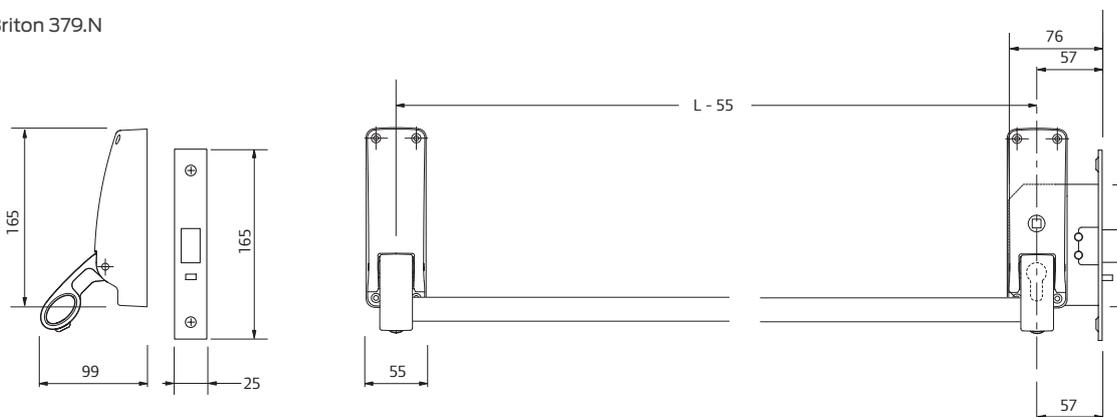

All dimensions are in mm

### Finishes

Available in sprayed silver and PVD plated finishes.

