

Panic Exit Hardware

Introduction

The Briton 376 is a push bar panic exit device with vertical bolts top and bottom. Designed to satisfy requirements for panic and emergency exit applications, this long established panic exit device is ideal for public areas where additional security is required.

Features & Functions

- Vertical bolts with top and bottom latching points.
- Products designed to satisfy panic exit applications or emergency exit applications.
- Tested in excess of 200,000 cycles.
- Suitable for single doors and double door applications.
- Handing reversible on-site.
- Durable aluminium die cast body and end boxes.
- Tubular steel cross bar and shoots can be cut on-site to suit door width and height.
- All versions supplied complete with fixings, installation instructions and self adhesive "Push Bar to Open" signage.
- Available in sprayed silver and plated metallic finishes.
- Options include alarm activation, manual hold-open (dogging) and quiet close pullman latches.

376
376.A
376.D
376.P
376.PD



Standard top latch

Top Pullman latch



Certification

CE Marked to EN 1125 (AAA011) and EN 179

Fire tested to EN 1634 for use on fire doors up to 2hr timber / 4hr steel

Certifire Approved

Environmental Product Declaration in accordance with ISO 14025 and EN 15803


DoP available at www.britondops.co.uk

Panic Exit Bolt 376


Product features	Product references				
	376	376.A	376.D	376.P	376.PD
CE marked	■	■	■	■	■
Panic exit device to EN 1125	■	■	■	■	■
Emergency exit device to EN 179	■	■	■	■	■
Device type	Push bar	Push bar	Push bar	Push bar	Push bar
Locking points	Double vertical bolts	Double vertical bolts	Double vertical bolts	Double vertical bolts	Double vertical bolts
Suitable for single doors	■	■	■	■	■
Suitable for double door combinations	⊕	⊕	⊕	⊕	⊕
Min. / Max. door width (per leaf)	665mm/1300mm				
Max. door height	2500mm (shoot extensions are available for taller doors - 376.ELTS)				
Push bar cut on site	■	■	■	■	■
Site reversible	■	■	■	■	■
Quiet close Pullman latches				■	■
Alarmed		■			
Dogged hold-open facility			■		■
Finishes available	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*	SE, SS*, PB*, PS*
CE Classification	376B1322AA	376B1322AA	376B1322AA	376B1322AA	376B1322AA

⊕ Used as a pair on non rebated doors or in combination with a Briton 378 rim latch fitted to the first opening leaf of rebated double doors.

[Click for Autocad drawings](#)

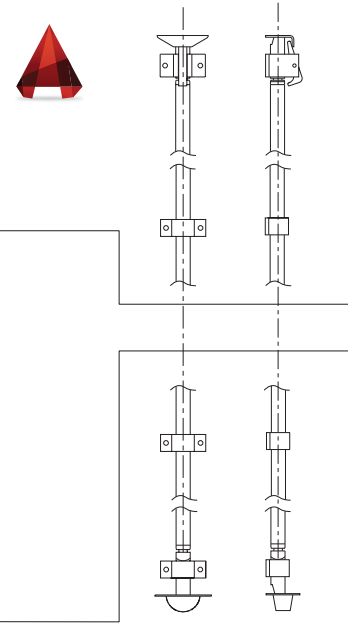

Briton 376 Vertical Bolts



L 1300 max.
L - 55

All dimensions are in mm

Finishes

Available in powder coated and PVD plated finishes.

Silver (SE) finish is powder coated for increased durability having salt-spray tested in excess of 240 hours.



SE
Sprayed silver



SS*
Satin stainless steel



PS*
Polished stainless steel



PB*
Polished brass

* PVD plated finishes