



560 Series

Panic exit hardware

The Briton 560 Series is a modular system of push bar panic exit hardware suitable for timber or metal doors.

The 560 push bar unit can be used on its own as a single point rim latch device or with the addition of vertical bolts can provide multi-point latching for single or double door combinations.



Top Pullman



Upper Side Pullman



Bottom Pullman



Lower Side Pullman

Certification

- CE Marked to EN 1125
- Fire tested to EN 1634 for use on fire doors up to 2hr timber / 2hr steel
- Tested to 500,000 cycles
- CE Classification **377B1422AA**
- DoP available at www.britoninspec.co.uk


Features & Functions

- Robust construction with improved durability suitable for all heavy traffic applications.
- Technologically advanced design with proven performance and reliability.
- Suitable for doors with a minimum clear opening width down to 500mm. This can be reduced to 350mm where side latches are not required.
- Unique assembly reduces installation time by as much as 50%.
- Push bar and shoots can be cut on-site.
- Easy-to-use Accufit templates and back-plates for the individual panic devices and the pullman latches
- Patented Fast-Fix cable system replaces the conventional vertical rods to connect the operating unit and the pullman latches
- Fine adjustments of the cable system are possible in-situ for maximum accuracy during installation

Briton

560 Series

Panic exit hardware

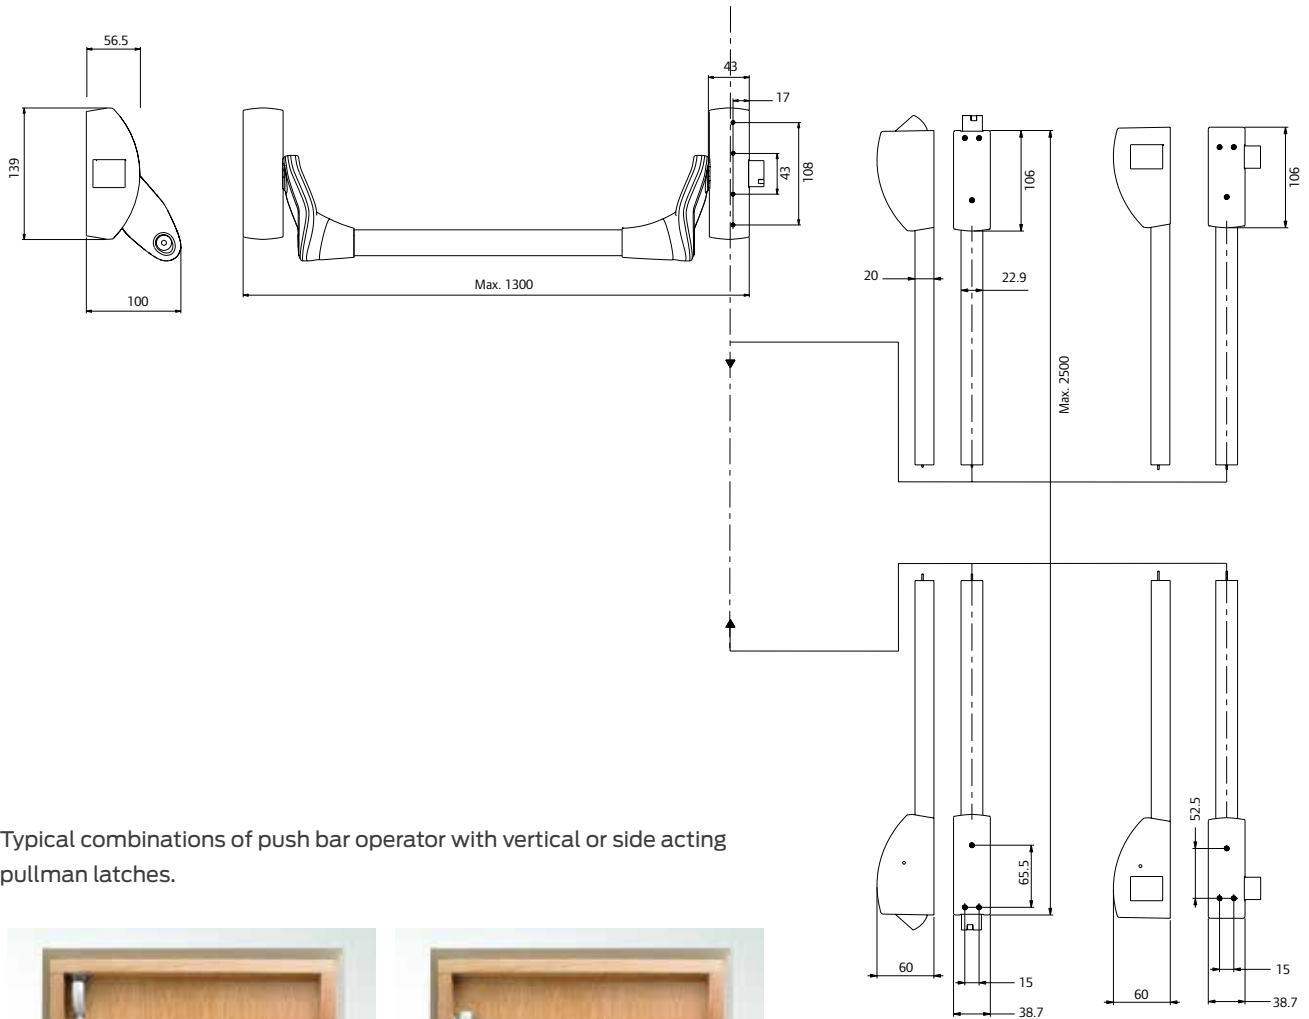

Typical combinations of push bar operator with vertical or side acting pullman latches.



ALLEGION 

Allegion (UK) Limited
Bescot Crescent, Walsall, West Midlands WS1 4DL

Tel: +44 (0) 1922 651370
Email: inspec@allegion.com